




Flat Cutter End Milling:

- End milling with flat cutter at -22,5^0, +45^0 range.

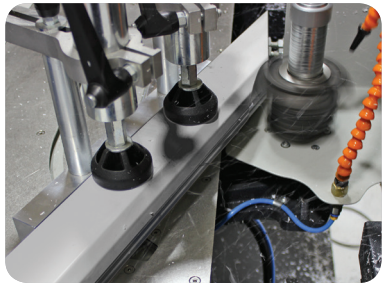


Reverse Cutter End Milling:

- End milling with reverse cutter at -22,5^0, -45^0 range.


Cutter Change System:

- Practical cutter change system provides ease of operation.

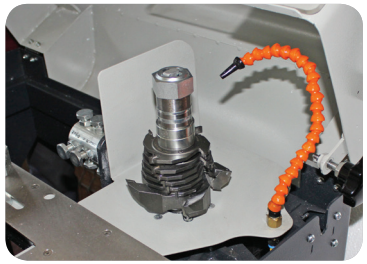

End Milling:

- Support system adjustable to four different profiles.
- High quality end milling thanks to hydropneumatic system.

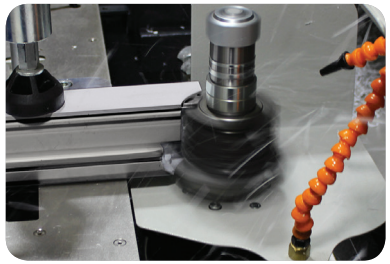


General Features


- End milling of Aluminium profiles at 22,5^0 +22,5^0 range.
- Has lubrication system.
- Angle adjustment with mechanical support plates.
- Practical cutter progress speed adjustment.
- Safe operation with safety cover.
- Practical cutter adjustment thanks to cutter gab.
- Cutter storing with cutter shelf.

Optional Equipments



- End Milling Cutters

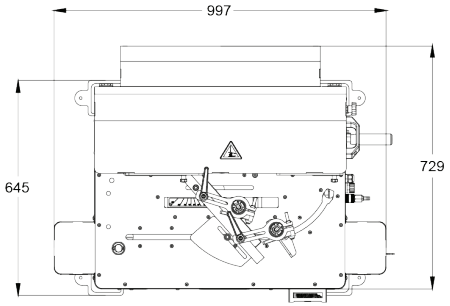

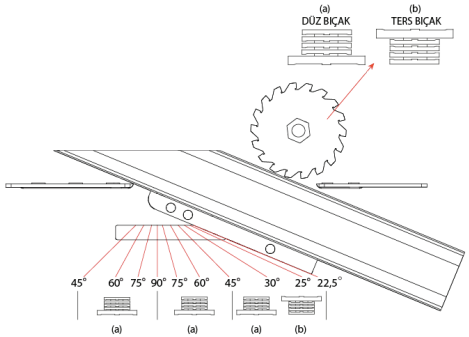

H: 1250 mm W: 1030 mm L: 770 mm	400 V L1-L2-L3-N-PE 50 / 60 Hz 1.5 kW	150 kg	6-8 Bar 120 l / min	a [max.: 130 mm min. : 35 mm h [max.: 120 mm min. : 35 mm	ØD: 180 mm Ød: 30 mm h max: 145 mm